

# HBTZ BS 19T

## Suitable accessories

- Spare wheel and holder
- Duomatic coupling
- Drawbar for different lengths and coupling heights
- Swivelling towing eye with Ø 40/50 mm towing eye
- 7-pin socket at rear
- Reversing light (additional)
- Work light
- Rotating beacon incl. 7-pin socket
- LED rotating beacon
- Screen-printed floor
- Steel chequer plate floor
- Forklift ram protection
- H-frame with steel grid
- Stanchion bags
- Plug-in stanchions
- Support bracket on front wall
- Plastic toolbox
- Night parking warning signs
- Rear marker boards
- Insertable aluminium rear panel
- Loading ramps with grating
- Hydraulic ramp jacks



LED rotating beacon



Swivelling towing eye with Ø 40/50 mm towing eye



Reversing lights



Steel chequer plate floor



Hydraulic ramp lift



Widening panels




Plastic tool box

Additional accessories available on request

# DETAILS

## TANDEM CONSTRUCTION MACHINE TRANSPORTER HBTZ BS 19T

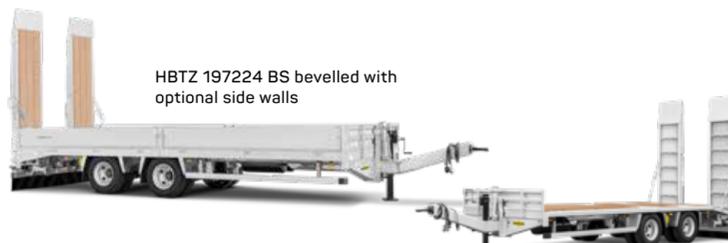

HBTZ 197224 BS bevelled with optional side walls

HBTZ 197224 BS bevelled as standard without side walls

### HBTZ BS 19T AND MORE



humbaur.com/en/trailer/  
heavy-duty-vehicle-transport-  
construction-vehicles-19t

### HBTZ 19T Technical details

Model name	HBTZ 197224 BS straight	HBTZ 197224 BS sloped	HBTZ 196524 BS straight	HBTZ 196524 BS sloped
Total permissible weight in kg	19 000	19 000	19 000	19 000
Total dimensions in mm (LxWxH)	9 380 x 2 550 x 3 890	9 380 x 2 550 x 3 720	8 680 x 2 550 x 3 890	8 680 x 2 550 x 3 720
Internal dimensions in mm (L x W)	6 240 x 2 430	7 200 x 2 450	6 500 x 2 450	6 500 x 2 450
Load capacity in kg	14 600	14 600	14 750	14 750
Load height in mm	870	870	870	870
Ramp angle in degrees	15	15	15	15
Tyres	235/75 R17.5	235/75 R17.5	235/75 R17.5	235/75 R17.5

Subject to technical modifications. All dimensions are approximate values and refer to the standard vehicle without accessories. Additional equipment changes both the unladen weight and the load capacity!

### HBTZ BS 19T General equipment

#### CHASSIS

- Axles with drum brake, pneumatic suspension (incl. lifting and lowering system)

#### BRAKING SYSTEM

- EBS pressurised air brake with double release valve, connection hoses with red/yellow couplings, brake system with spring brake

#### TYRES

- Dual tyres as standard

#### DRAWBAR SYSTEM

- Central bar with screw drawbar eye Ø 50 mm, galvanised, can be infinitely adjusted via the crank handle

#### ELECTRICS

- 15-pin connector
- 12/24-volt lighting system with multi-chamber rear lights, optimally protected and LED side marker lights

#### LOADING + LOAD SECURING

- Lashing points 10 t, set into bridge floor (3 pairs / 6.2 m; 4 pairs / 7.2 m)
- Lashing points 2 t in the outer frame (7 pairs / 6.2 m; 8 pairs / 7.2 m)

#### RAMPS

- Solid steel ramps, galvanised, laterally adjustable, covered with softwood or optional grating covering, pressurised gas ramp lift

#### CHASSIS FRAME

- Solid, welded and hot-dip galvanised frame for optimum stability and safety, anodised aluminium drop sides, can be folded down at the sides and rear, removable, plug-in corner stanchions at the front and rear
- Flooring made from 40 mm softwood planks, pressure impregnated / painted
- Mudguard with antispray, rigid side impact guard
- 2 wheel chocks with holder
- Reinforced 12 t geared support winch with load and high-speed gear, folding support legs at the rear left and right of the chassis
- Optionally with divided aluminium/steel side walls with central stanchion

## TANDEM CONSTRUCTION MACHINE TRANSPORTER HBTZ BS 19T



Especially hard-wearing construction



Heavy loads made easy – HGV TRAILERS FROM HUMBAUR

- Easy to operate
- Lifelong use
- Safe transport
- Long-term savings



Do you have any questions, or would you like a personal consultation? We look forward to hearing from you!



Contact us by phone on **+49 (0)821 24 929 - 0** or via email at [lkw-anhaenger@humbaur.com](mailto:lkw-anhaenger@humbaur.com)



Find your dealer or service partner now! [humbaur.com/en/dealerservice/dealer-search](http://humbaur.com/en/dealerservice/dealer-search)


# TANDEM CONSTRUCTION MACHINE TRANSPORTER HBTZ BS 19T

## HIGH LIGHTS

Our multi-functional trailers of the HBTZ BS series are constructed with a galvanised undercarriage for an especially long service life. Foldable support feet and a low loading height provide for safety and comfort during loading and unloading. Thanks to the standard lowerable air suspension and the 3100 mm ramps, the trailer boasts a street-ready a ramp angle of just 13 degrees.



HBTZ 197224 BS bevelled as standard without side walls

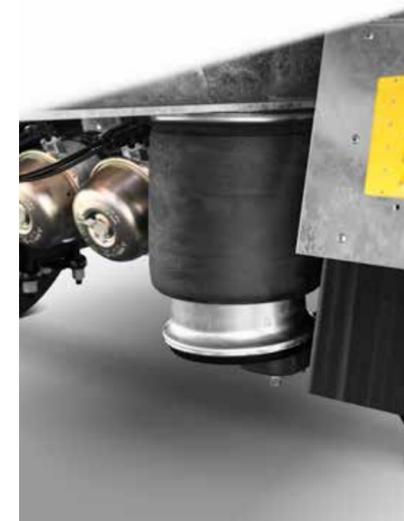

EBS pressurised air brake with double release valve, connection hoses with red/yellow couplings, brake system with spring brake

Ingenious functionality down to the last detail



HBTZ 197224 BS bevelled with optional side walls

### EASY TO USE

- Infinitely adjustable drawbar
- 15-pin connector plug

### USE IT FOR LIFE

- Stable, maintenance-friendly floor
- Steel mudguards with anti-spray

### SECURE TRANSPORT

- Dual tyres for a higher payload
- EBS brake system according to ECE directive
- Reinforced 12 t geared support winch



Your heavy load benefit package  
NOW STANDARD FOR ALL  
HUMBAUR HGV TRAILERS

More information in this video  
<https://www.youtube.com/watch?v=YSHii7PSIU>

